



## TECHNICAL INFORMATION (CONT'D)

### Mechanical

Base description . . . . .					medium 5-pin
Net weight, approx . . . . .					3 ounces
Shipping weight, approx. . . . .					3 pounds
Mounting position . . . . .					vertical or horizontal

### MAXIMUM RATINGS AND TYPICAL OPERATING CONDITIONS

	Typical Operation				Maximum Ratings	
	CCS	500	600	750	CCS	ICAS
<b>CLASS AB<sub>2</sub> AUDIO-FREQUENCY POWER AMPLIFIER (TWO TUBES)</b>						
D-c plate voltage . . . . .	400	500	600	750	600	750
Max signal plate current (per tube)† . . . . .					120	120
D-c max signal plate input (per tube)† . . . . .					60	90
Plate dissipation (per tube)† . . . . .					25	30
D-c grid voltage . . . . .	-25	-25	-30	-32		volts
Positive d-c grid voltage . . . . .	300	300	300	300	300	volts
Peak a-f grid input voltage (grid to grid) . . . . .	78	78	78	92		volts
Zero signal plate current . . . . .	100	100	60	60		milliamperes
Max signal plate current . . . . .	240	240	200	240		milliamperes
Max signal screen grid current . . . . .	10	10	10	10		milliamperes
Screen grid input† . . . . .					3.5	3.5
Peak grid input power‡ . . . . .	0.35	0.6	0.4	0.5		watts
Load resistance (per tube) . . . . .	800	1060	1600	1740		ohms
Effective load (plate to plate) . . . . .	3200	4240	6400	6960		ohms
Max signal plate power output§ . . . . .	55	75	80	120		watts

### CLASS B RADIO-FREQUENCY POWER AMPLIFIER

	(Carrier conditions per tube for use with a max modulation factor of 1.0)					
	CCS	500	600	750	CCS	ICAS
<b>CLASS B RADIO-FREQUENCY POWER AMPLIFIER</b>						
D-c plate voltage . . . . .	400	500	600	750	600	750
D-c grid voltage . . . . .	-25	-25	-25	-35		volts
D-c screen grid voltage . . . . .	250	250	250	300	300	volts
D-c grid current . . . . .	0	0	0	0		milliamperes
D-c plate current . . . . .	75	75	62.5	60	80	milliamperes
D-c screen grid current . . . . .	4	4	3	3		milliamperes
Plate input . . . . .					37.5	45
Screen grid input . . . . .					2.5	2.5
Plate dissipation . . . . .					25	30
Peak r-f grid input voltage . . . . .	30	30	20	27		volts
Driving power♦, approx . . . . .	0.25	0.25	0.2	0.12		watt
Plate power output . . . . .	9	12.5	12.5	15		watts

### CLASS C RADIO-FREQUENCY POWER AMPLIFIER AND OSCILLATOR—PLATE MODULATED

	(Carrier conditions per tube for use with a max modulation factor of 1.0)					
	CCS	400	475	600	CCS	ICAS
<b>CLASS C RADIO-FREQUENCY POWER AMPLIFIER AND OSCILLATOR—PLATE MODULATED</b>						
D-c plate voltage . . . . .	325	400	475	600	475	600
D-c grid voltage . . . . .	-75	-80	-85	-90	-200	-200
From a grid resistor of . . . . .	25000	22800	21300	22500		volts
D-c screen voltage . . . . .	225	225	225	275	300	ohms
From a series resistor of $\Delta$ . . . . .	20000	30000	50000	50000		volts
D-c plate current . . . . .	80	80	83	100	83	100
D-c grid current, approx. . . . .	3	3.5	4	4	5	5
D-c screen grid current . . . . .	5	5.75	5	6.5		milliamperes
Plate input . . . . .					40	60
Screen grid input . . . . .					2.5	2.5
Plate dissipation . . . . .					16.5	25
Peak r-f grid input voltage, approx. . . . .	90	95	110	115		volts
Driving power, approx. . . . .	0.25	0.3	0.4	0.4		watts
Plate power output . . . . .	17.5	22.5	27.5	42.5		watts

## CLASS C RADIO-FREQUENCY POWER AMPLIFIER AND OSCILLATOR

(Key down conditions per tube without modulation) +	CCS	ICAS	CCS	ICAS
D-c plate voltage.....	400	500	600	750
D-c grid voltage.....				-200
From a fixed supply of.....	-45	-45	-45	-45
From a cathode resistor of.....	410	410	410	410
From a grid resistor of.....	12800	12800	12800	12800
D-c screen grid voltage.....				300
From a fixed supply of.....	250	250	250	250
From a series resistor of.....	20000	42000	50000	85000
D-c plate current.....	100	100	100	100
D-c grid current, approx.....	3.5	3.5	3.5	3.5
D-c screen grid current.....	7.5	6	7	6
Plate input.....				60
Plate dissipation.....				25
Screen grid input.....				3.5
Peak r-f grid input voltage, approx.....	65	65	65	65
Driving power, approx.....	0.2	0.2	0.2	0.2
Plate power output.....	25	30	40	50

†Averaged over any audio-frequency cycle of sine-wave form.

+Modulation, essentially negative, may be used if the positive peak of the audio-frequency envelope does not exceed 115 per cent of the carrier conditions.

φ Subscript (2) indicates that grid current flows during some part of input cycle.

¶ Heater voltage fluctuations should not exceed +10 or -5 per cent from the rated value.

†Driver stage should be capable of supplying the grids of the Class AB<sub>2</sub> stage with the specified peak values at low distortion. The effective resistance per grid circuit of the Class AB<sub>2</sub> stage should be kept below 500 ohms and the effective impedance of the highest desired response frequency should not exceed 700 ohms.

§With zero-impedance driver and perfect regulation, plate circuit distortion does not exceed 2 per cent. In practice, plate-voltage regulation, positive grid voltage regulation, and grid bias regulation should not be greater than 5 per cent, 5 per cent, and 3 per cent, respectively.

◆ At crest of a-f cycle with modulation factor of 1.0.


△Connected to modulated plate-voltage supply.

## APPLICATION NOTES

The GL-807 can be operated at frequencies as high as 60 megacycles. The tube may be operated at higher frequencies provided the maximum values of plate voltage

TECHNICAL INFORMATION.) The tabulation below shows the highest percentage of maximum plate voltage and power input that can be used up to 125 megacycles for the

GL-807 AVERAGE CHARACTERISTICS  
( $E_t = 6.3$  VOLTS, SCREEN VOLTS = 300)

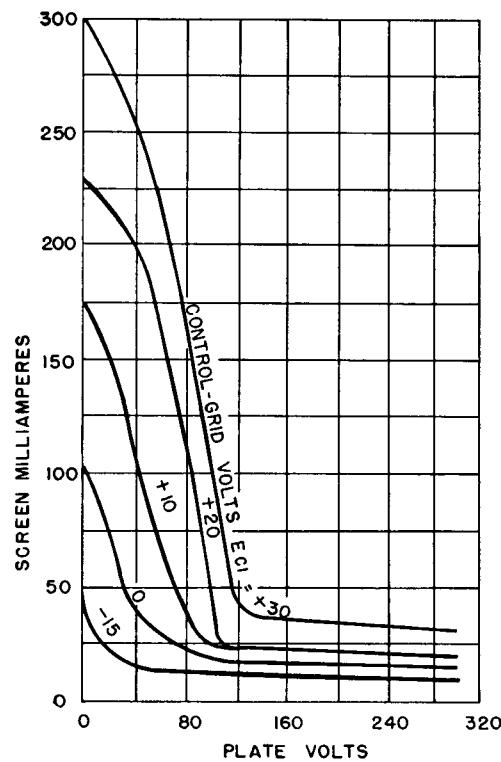


K-8639690


9-28-44

GL-807 AVERAGE PLATE CHARACTERISTICS WITH  $E_{C1}$  AS VARIABLE  
( $E_t = 6.3$  VOLTS, SCREEN VOLTS = 300)



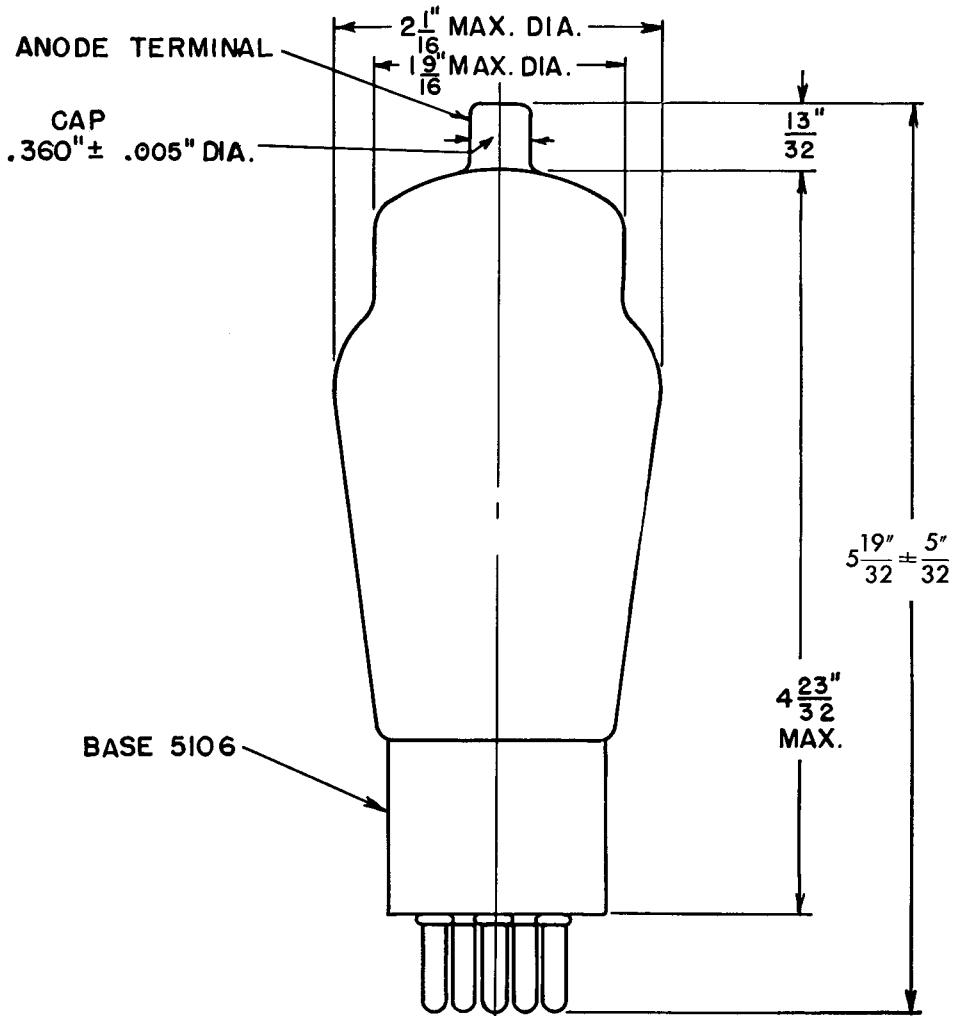

P = ANODE
G <sub>2</sub> = SCREEN
G <sub>1</sub> = GRID
K = CATHODE
H = HEATER
PBF = BEAM - FORMING PLATES

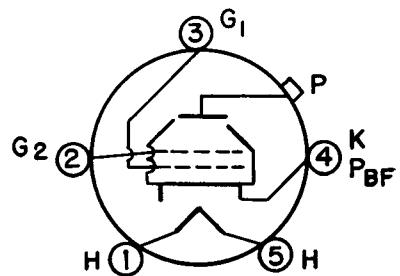

BOTTOM VIEW OF  
SOCKET CONN.

K-8639602

OUTLINE  
GL-807 PIOTRON

9-23-44

*Electronics Department*  
**GENERAL**  **ELECTRIC**  
Schenectady, N. Y.