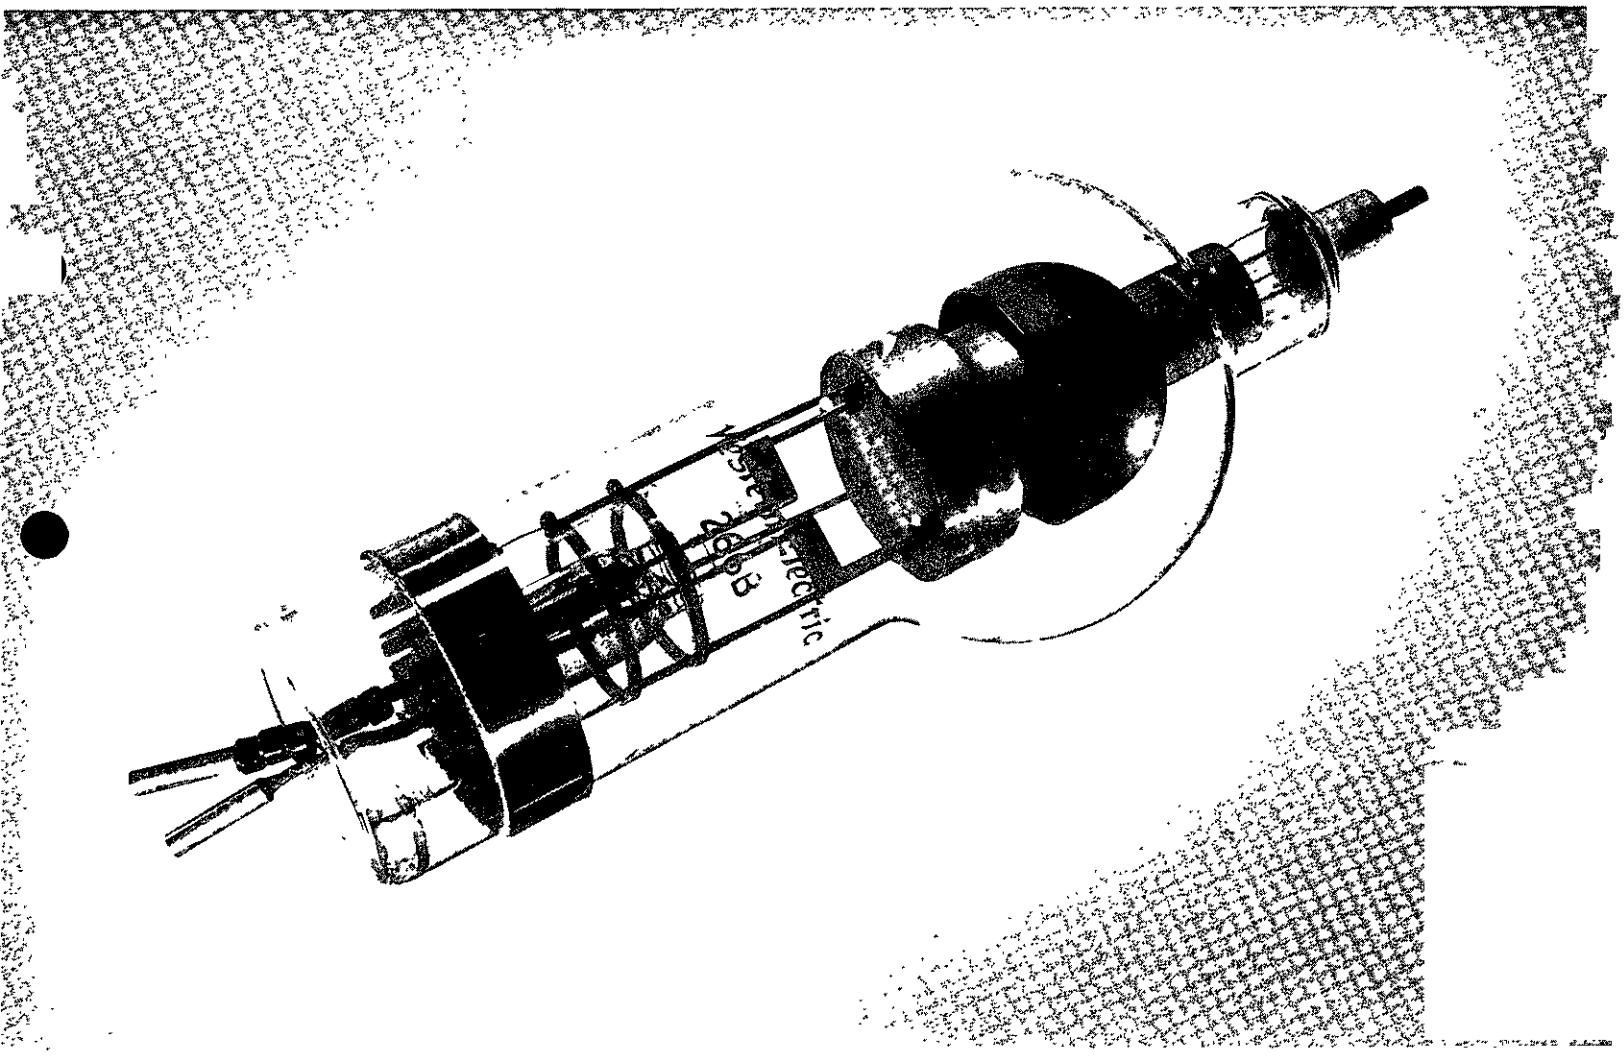

RECTIFIER
HALF-WAVE, MERCURY-VAPOR

Western Electric

DESCRIPTION

The 266B is a half-wave, mercury-vapor rectifier tube for use in high-voltage rectifier circuits.

MAXIMUM RATINGS

Peak Inverse Anode Voltage	22000 volts
Average Cathode Current (Quadrature Operation)	10 amperes

MAXIMUM RATINGS, ABSOLUTE VALUES

Peak Inverse Anode Voltage for	
Condensed Mercury Temperature 20 to 40 C	22000 volts
Condensed Mercury Temperature 20 to 50 C	12500 volts
Cathode Current	
Peak	
In-phase Operation	20 amperes
Quadrature Operation	40 amperes
Average	
In-phase Operation	5 amperes
Quadrature Operation	10 amperes
Surge (maximum duration 0.2 second)	200 amperes
Averaging Time	60 seconds
Frequency	150 cycles/sec.

ELECTRICAL DATA	Min.	Bogey	Max.	
Filament Voltage	4.75	5.0	5.25	volts
Filament Current at 5.0 Volts	.....	42	46	amperes
Cathode Heating Time, Required	300	.....	.....	seconds
Anode Voltage Drop	.....	15	.....	volts
Critical Anode Voltage	.....	.....	100	volts

MECHANICAL DATA

Net Weight, Approximate	4¼ pounds
Equilibrium Condensed Mercury Temperature Rise	
At Full Load, Approximate	18 centigrade
At No Load, Approximate	15 centigrade

Cooling — The condensed mercury temperature should be held within the range specified for the maximum peak inverse anode voltage appropriate to the application. If forced-air cooling is necessary, a flow of 6 cubic feet per minute from a 1-inch nozzle directed at the zone of mercury temperature control just below the support collar ordinarily will be adequate.

Mounting — This tube has a collar at the filament end of the tube by which it is supported when mounted. It should be mounted in a vertical position only, with the filament end down. Connections to the anode and filament terminals should be flexible. Sufficient clearance should be maintained around the tube to insure free air circulation.

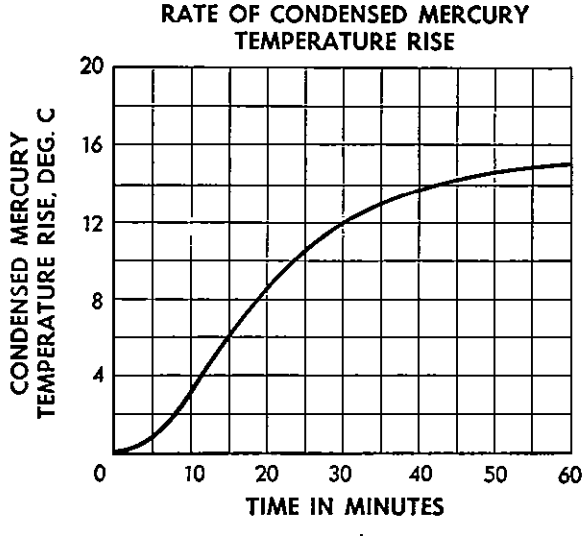

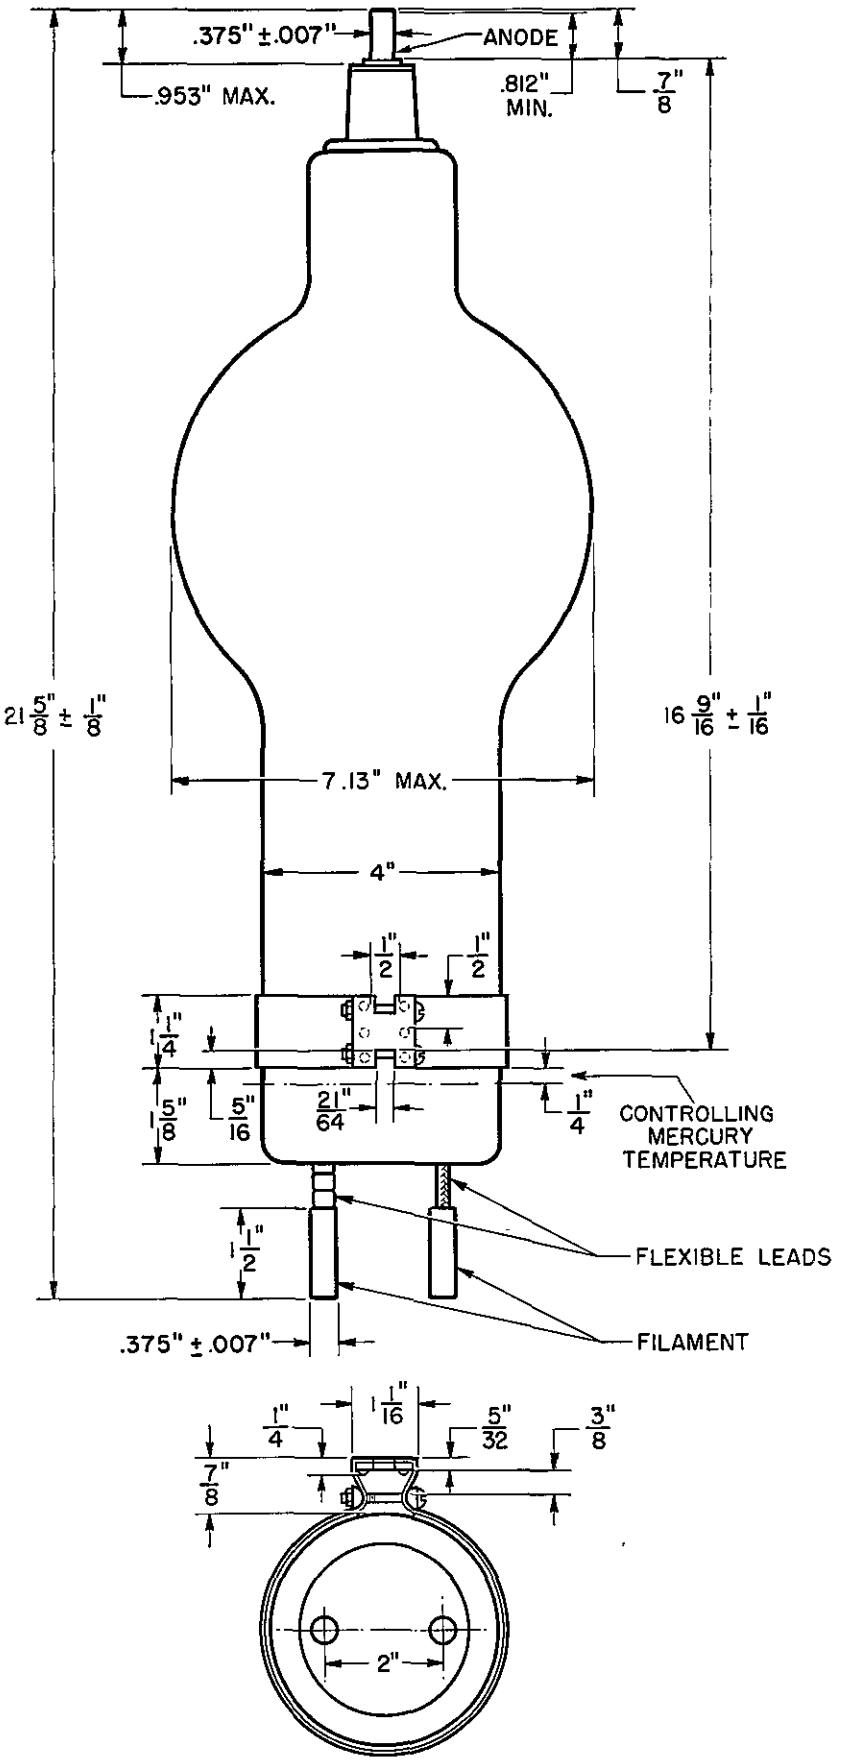
.375" ±.007"
ANODE
.953" MAX.
.812" MIN.
7/8"
21 5/8" ± 1/8"
16 9/16" ± 1/16"
7.13" MAX.
4"
1/2"
1/2"
1 1/4"
1 5/8"
5/16"
21/64"
1/4"
CONTROLLING MERCURY TEMPERATURE
1 1/2"
FLEXIBLE LEADS
.375" ±.007"
FILAMENT
1/4"
1 1/16"
5/32"
3/8"
7/8"
2"

Western Electric

A development of Bell Telephone Laboratories, the research laboratories of the American Telephone and Telegraph Company and the Western Electric Company.

1-D.—7S PRINTED IN U.S.A. WECO—T2451