


DIODE

Heating : indirect by A.C. or D.C.
parallel supply
Chauffage : indirect par C.A. ou C.C.
alimentation- parallèle
Heizung : indirekt durch Wechsel-
oder Gleichstrom; Parallel-
speisung

$V_f = 6,3 \text{ V}$

$I_f = 0,15 \text{ A}$

Dimensions in mm
Dimensions en mm
Abmessungen in mm



Capacitance
Capacités
Kapazitäten


$C_{dk} = 2,1 \text{ pF}$

Limiting values
Caractéristiques limites
Grenzdaten

$V_d \text{ inv}_p$	= max.	560 V
I_d	= max.	5 mA
I_{dp}	= max.	30 mA
V_{kf}	= max.	100 V
R_{kf}	= max.	20 k Ω

EA 50

PHILIPS

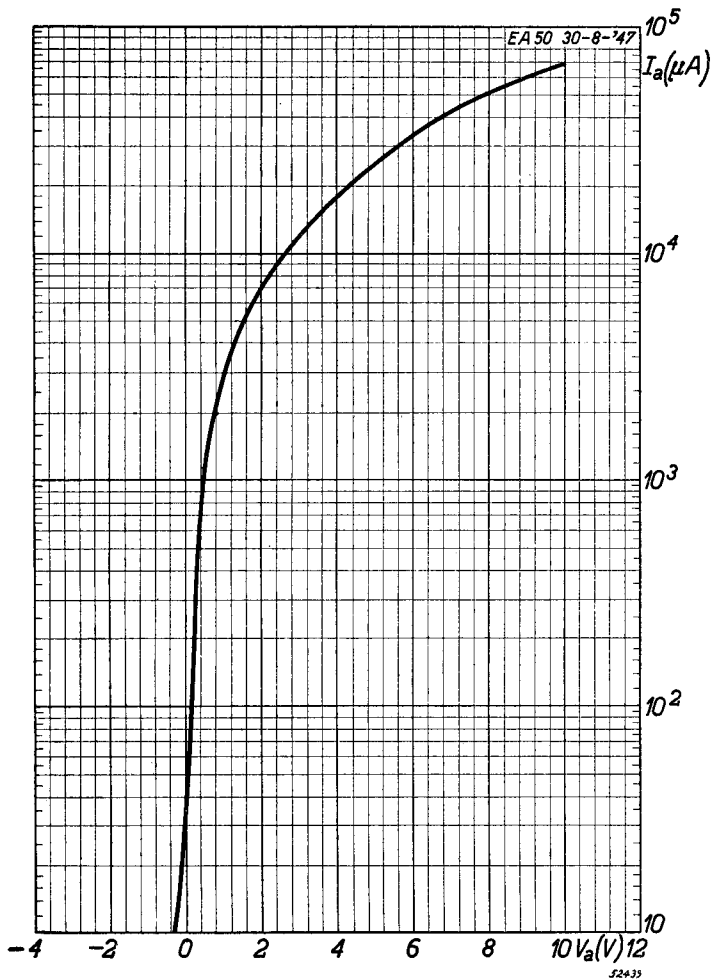

PHILIPS



*Electronic
Tube*

HANDBOOK

page	EA50 sheet	date
1	1	1953.11.11
2	A	1953.11.11
3	FP	1999.04.10