

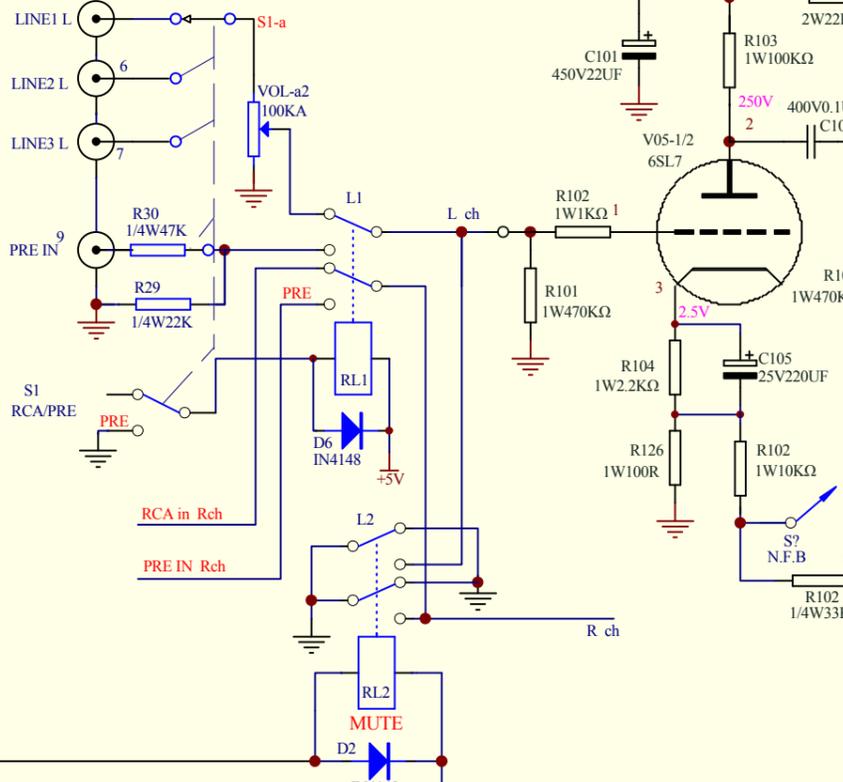
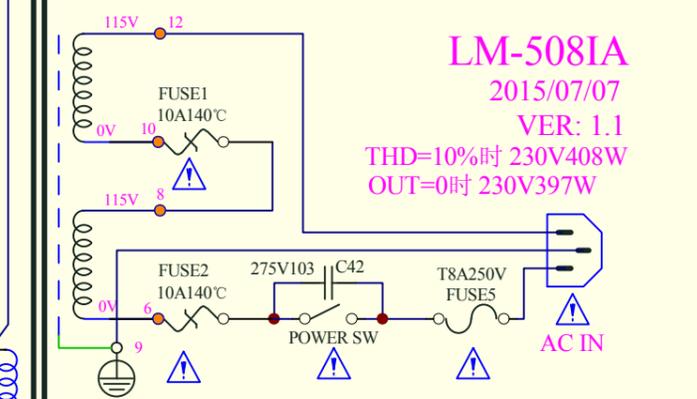
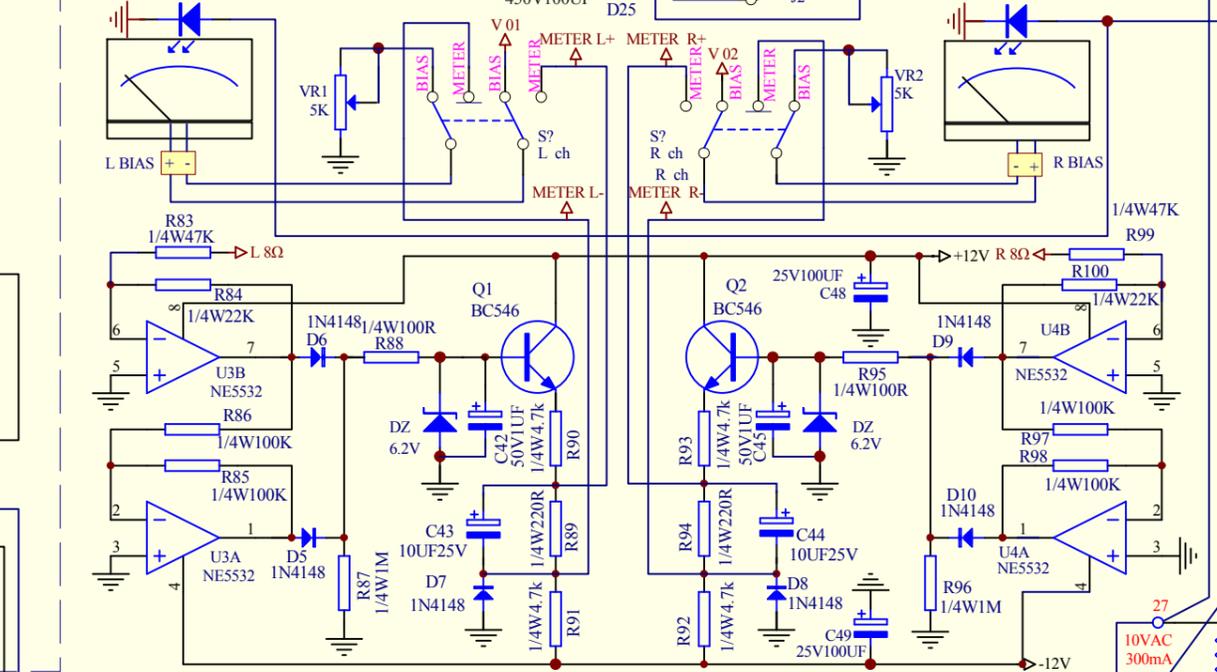
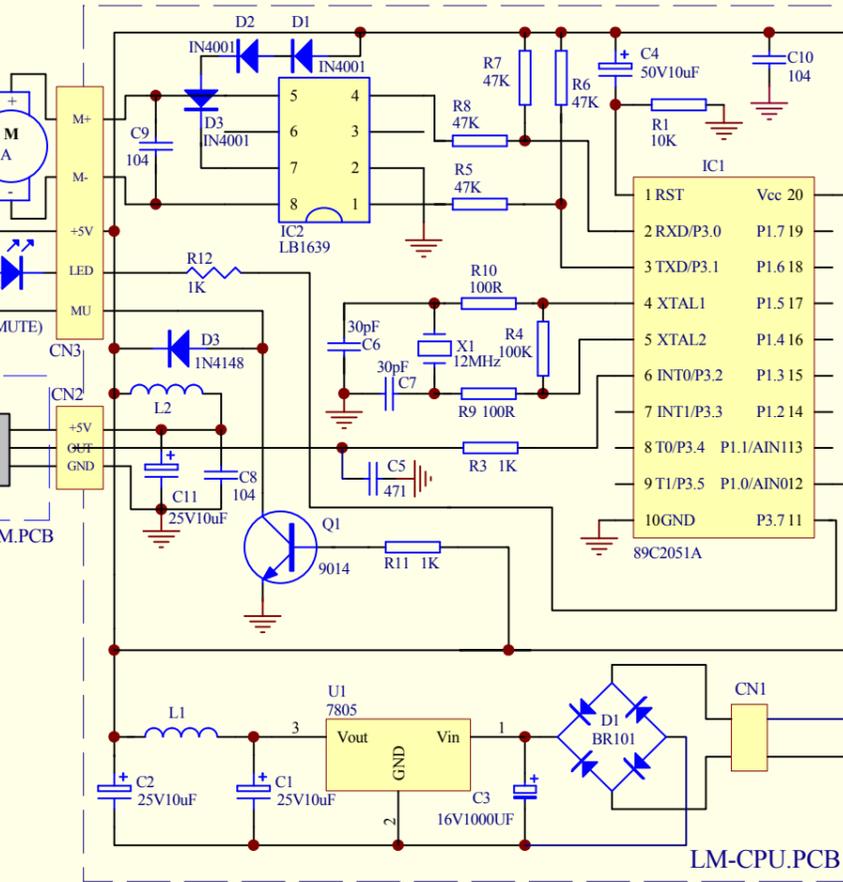
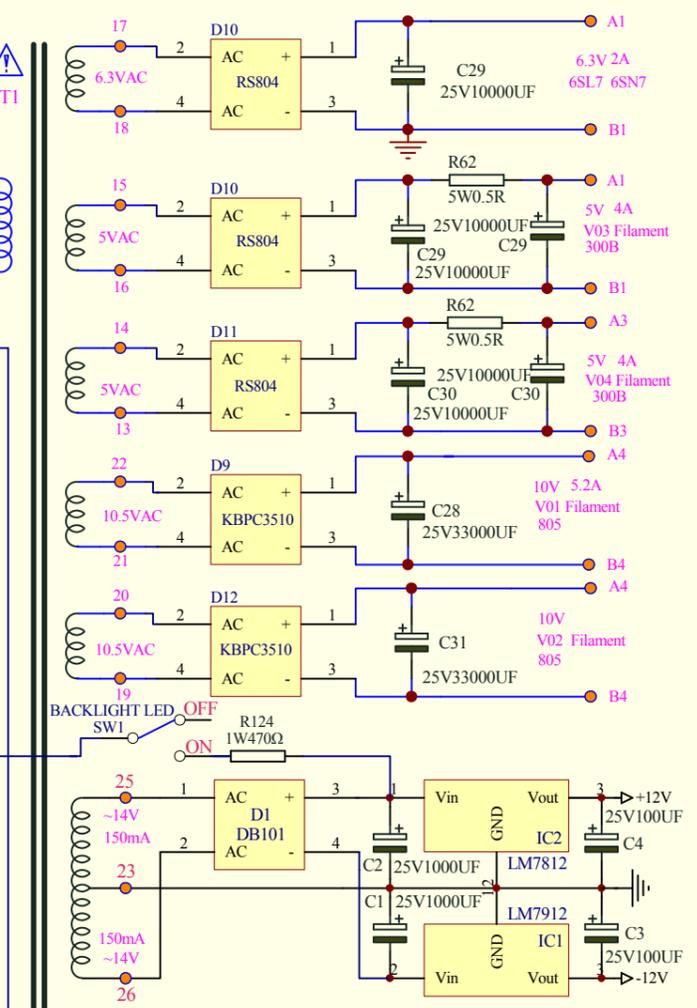
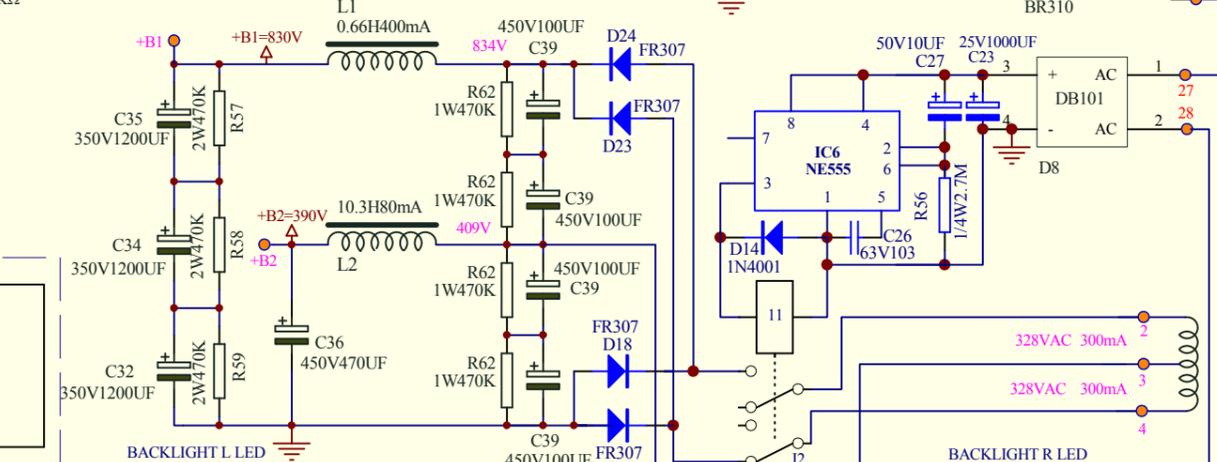


Signal Input

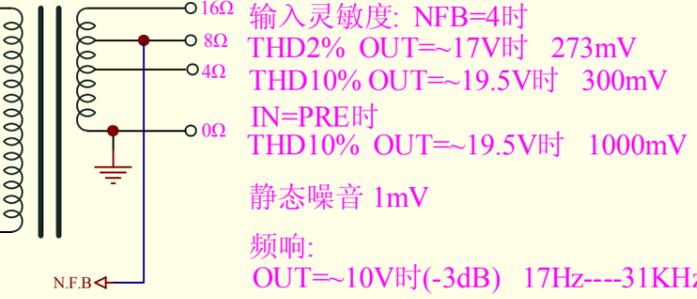

输入灵敏度: NFB=4时
THD2% OUT~17V时 273mV
THD10% OUT~19.5V时 300mV
IN=PRE时
THD10% OUT~19.5V时 1000mV
静态噪音 1mV
频响:
OUT~10V时(-3dB) 17Hz---31KHz

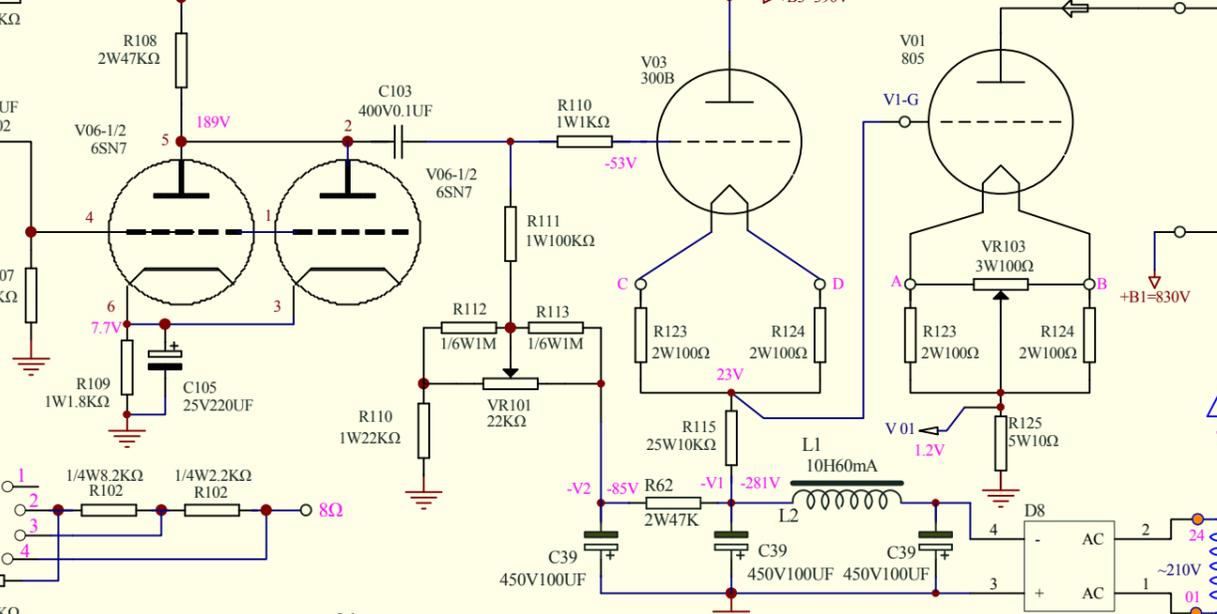

LM-5081A
2015/07/07
VER: 1.1
THD=10%时 230V408W
OUT=0时 230V397W